



# JBL Charge Battery Replacement

This guide will walk you through replacing a shorted or old battery.

Written By: Joe Durand



## INTRODUCTION

If your speaker is not working or sounds like it's not delivering the high quality you expect from JBL, maybe you need to replace the battery. Replacing the battery can breathe new life into your worn device.

---



### TOOLS:


- [Phillips #1 Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
  - [Razor Blade](#) (1)
  - [Spudger](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Disassembling JBL Charge Casing



- Make sure the device is powered off before you begin.
- Use a Jimmy or metal spudger on each corner to separate the trim from the device.


## Step 2

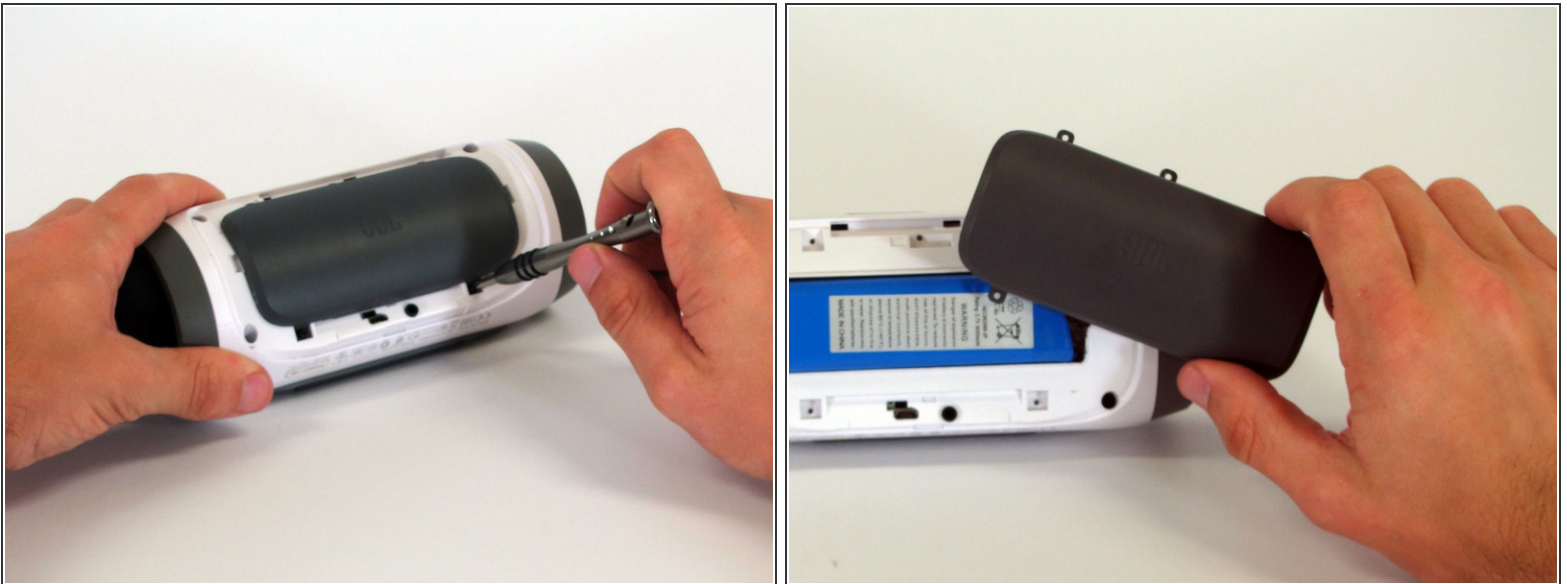

- Use the PH1 screwdriver to remove the five 6 mm Phillips screws from the battery cover.
- Remove the battery cover and set it aside.



### Step 3

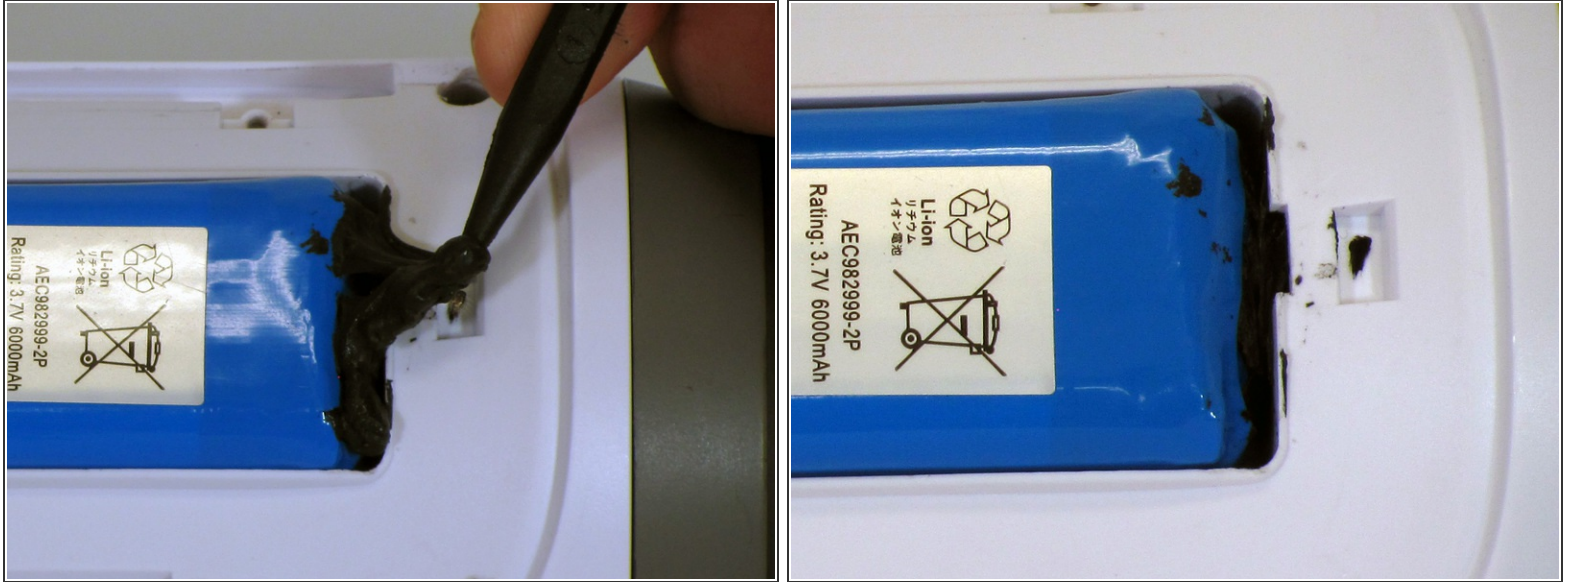

- Use a spudger to remove most of the liquid electrical tape from the battery and battery compartment.

⚠ Be careful to not puncture the battery or damage the battery wire under the liquid electrical tape.

## Step 4



- Use a metal spudger to pry the edge of the battery out of the device.
- Lift the battery just enough to remove the 16mm PH2 screw underneath it.

⚠ Lifting the battery too far will cause damage to the battery wire.

## Step 5



- Remove the remaining four 16mm Phillips screws from the white plastic casing with the PH2 screwdriver.



## Step 6



- Start in a corner, where the casing and the side meet. Use a pointed metal spudger to pry apart the glue holding these seams together.
- Slide the metal spudger along these seams to separate the back casing from the rest of the speaker.




## Step 7

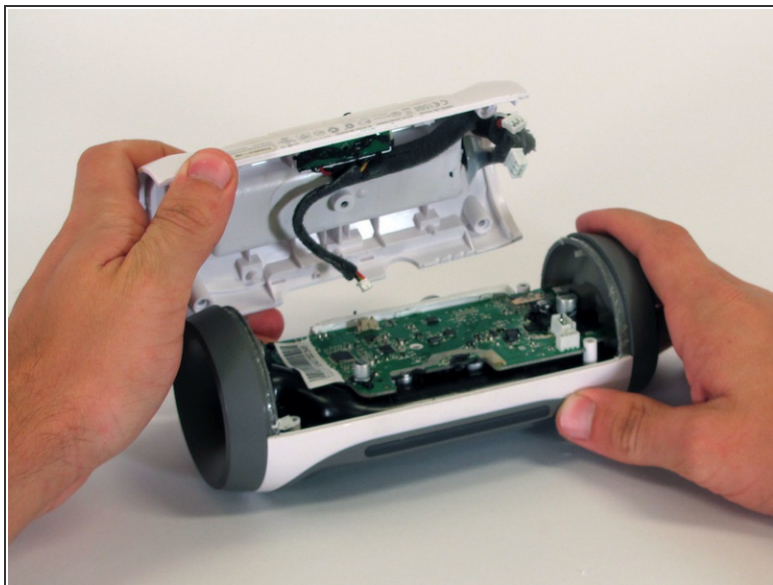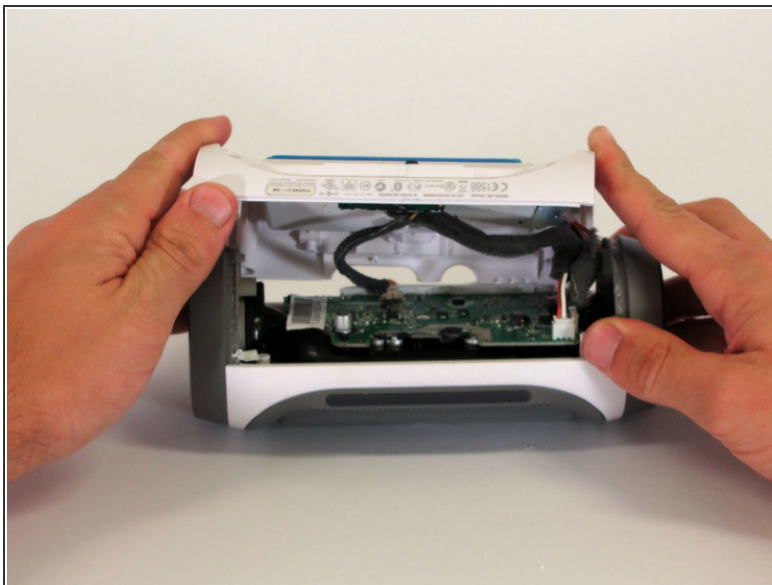


- Once the device is open, disconnect the three white connectors from the motherboard.
- Separate the two pieces of the casing.

## Step 8 — Battery

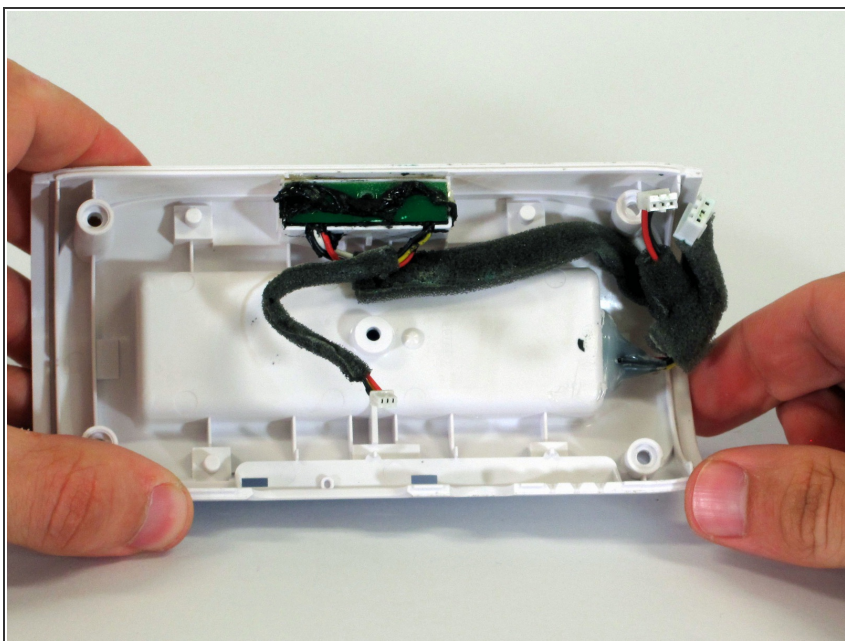


- Turn your attention to the back casing removed earlier.

## Step 9

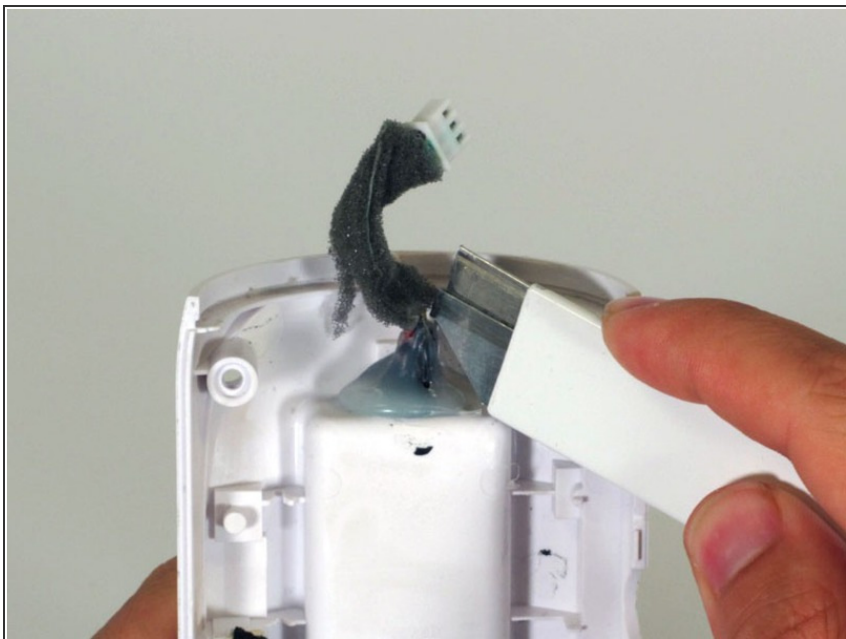

- Using a razor blade, remove the glue holding the battery cable in place.
- Use multiple vertical cuts to remove pieces of the glue.

 Be careful not to cut the battery cables.


## Step 10



- Pull off the foam surrounding the battery cable.



## Step 11

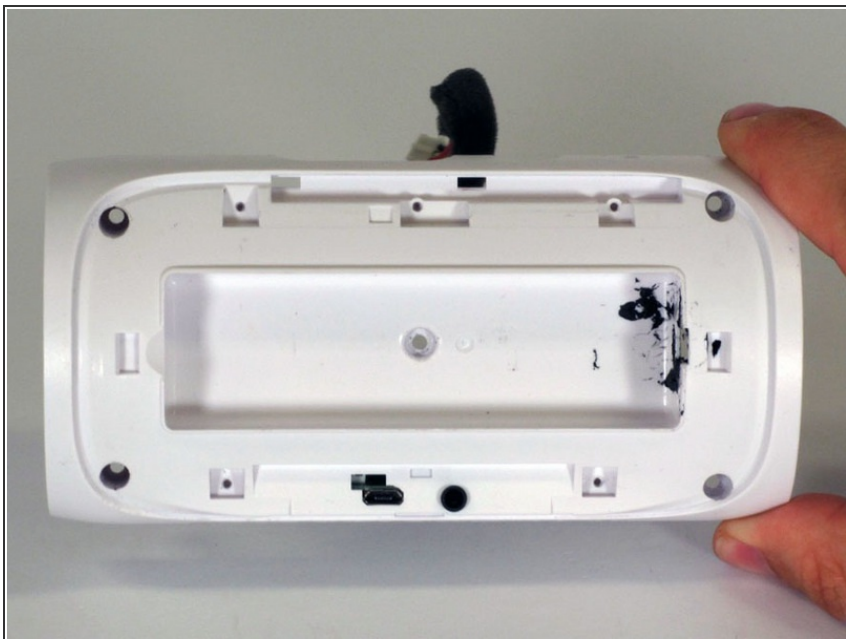

- Feed the battery cable through the hole and remove the battery.
- This entire white piece needs to be replaced (if replacing the aux/usb port)

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 11:21:52 PM.